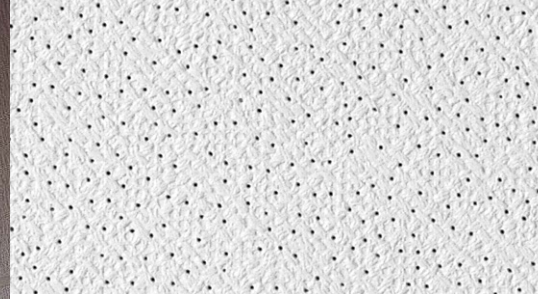




# Orion™ 210 ClimaPlus™



Fine textured panel



#### Features and Benefits

- Washable vinyl face for easy maintenance.
- Very good sound absorption (NRC .65) at mid-range price.
- Lightweight for quick installation.
- CLIMAPLUS™ 15-year System Warranty to withstand conditions up to 90 °F (32 °C)/90% relative humidity without visible sag when used with USG's DONN® Brand Suspension Systems.

#### Applications

- Schools
- Convenience stores
- Corridors
- Discount stores
- Grocery stores
- Healthcare
- Retail stores

ORION™ 210 Panels with CLIMAPLUS™ Performance/DONN® Brand DX®/DXL™ Suspension System


















# Orion™ 210 ClimaPlus™

Acoustical Ceilings

Technical Service 800 USG.4YOU  
Web Site [www.usg.com](http://www.usg.com)  
Samples/Literature 888 874.2450  
Samples/Literature Fax 888 874.2348  
Customer Service 800 950.3839  
Literature Number SC1834



UL Classified

| Edge  | Panel Size  | Class   | Item No.  | NRC   | CAC Min. | LR <sup>1</sup> | Color | Grid Options     | Recycled Content <sup>2</sup> | Panel Cost |   |   |   |   |   |                    |           |              |       |     |                      |  |  |  |  |   |   |   |   |   |
|---|---|---|---|---|----------|-----------------|-------|------------------|-------------------------------|------------|---|---|---|---|---|--------------------|-----------|--------------|-------|-----|----------------------|--|--|--|--|---|---|---|---|---|
| ORION™ 210<br>CLIMAPLUS™ Panels   | (SQ)<br> | Class A   | 62111   | .65   | 25       | .76             | White | A, B, C,<br>D, E | 72%                           | \$         |   |   |   |   |   |                    |           |              |       |     |                      |  |  |  |  |   |   |   |   |   |
|   |          | Class A   | 64111   | .65   | 25       | .76             | White | A, B, D, E       | 72%                           | \$         |   |   |   |   |   |                    |           |              |       |     |                      |  |  |  |  |   |   |   |   |   |
| <table border="1"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> <th>D</th> <th>E</th> </tr> <tr> <td>Donn® DX®/<br/>DXL™</td> <td>Donn DXW™</td> <td>Centricitee™</td> <td>ZxLA™</td> <td>AX™</td> </tr> </thead> <tbody> <tr> <td colspan="5">Grid Profile Options</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> |   |   |   |   |          |                 |       |                  |                               |            | A | B | C | D | E | Donn® DX®/<br>DXL™ | Donn DXW™ | Centricitee™ | ZxLA™ | AX™ | Grid Profile Options |  |  |  |  |  |  |  |  |  |
| A   | B   | C   | D   | E   |          |                 |       |                  |                               |            |   |   |   |   |   |                    |           |              |       |     |                      |  |  |  |  |   |   |   |   |   |
| Donn® DX®/<br>DXL™  | Donn DXW™   | Centricitee™  | ZxLA™   | AX™   |          |                 |       |                  |                               |            |   |   |   |   |   |                    |           |              |       |     |                      |  |  |  |  |   |   |   |   |   |
| Grid Profile Options  |   |   |   |   |          |                 |       |                  |                               |            |   |   |   |   |   |                    |           |              |       |     |                      |  |  |  |  |   |   |   |   |   |
|    |          |  |  |  |          |                 |       |                  |                               |            |   |   |   |   |   |                    |           |              |       |     |                      |  |  |  |  |   |   |   |   |   |

**ASTM E1264 classification**  
Type IV, Form 1 or 2, Pattern CE  
**ASTM E84 surface burning characteristics**  
Class A  
Flame spread: 25  
Smoke developed: 25

**Weight**  
0.58 lb./ft.<sup>2</sup>  
**Thermal resistance**  
R-1.7  
**Maximum backloading**  
See Warranty for details.  
**Maintenance**  
Can be cleaned easily with a damp sponge.

**Patented technology**  
This product's unique combination of vinyl facings, sag resistance, and sound performance results from a technology covered by U.S. Patent No. 5,250,153.

**Footnote**  
1. LR values are shown as averages.  
2. For details, see the Recycled Content selector.

**SAFETY FIRST!**  
Follow good safety practices. Read material safety data sheets and related literature on products before specification and/or installation.



Manufactured by  
USG Interiors, Inc.  
125 South Franklin Street  
Chicago, IL 60606

The following are trademarks of USG Interiors, Inc. or a related company: AX, CENTRICITEE, CLIMAPLUS, Donn, DX, DXL, DXLA, DXW, Orion, USG, ZXLA.

SC1834/rev. 6-04  
© 2004, USG Interiors, Inc.  
Printed in U.S.A.