



Fineline® 1/8 DXFF



Features and Benefits

- Narrow-profile, slotted grid system with 1/8" reveal provides a streamlined appearance.
- Mitered intersections offer a clean, tailored appearance.
- Optional air diffuser provides clean, uninterrupted ceiling plane.
- Lifetime limited warranty when used with USG ceiling panels ensures owner satisfaction.
- Hot-dipped galvanized steel body inhibits red rust.


Applications

- All interior general use areas



- System meets or exceeds UL load compliance specifications per ASTM C635.

Profile

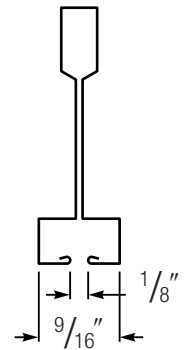



Fineline® 1/8 DXFF

DONN® Brand Suspension Systems
Narrow 9/16" Face
with 1/8" Reveal


Technical Service 800 USG.4YOU
Web Site www.usg.com
Samples/Literature 888 874.2450
Samples/Literature Fax 888 874.2348
Customer Service 800 950.3839
Literature Number AC3033




UL Classified—Rated Load ^{1,2,3}

| 9/16" Tee System | ASTM Class | Length | Height | Item No. | Class | Color | 4' Hanger Spacing | 5' Hanger Spacing | 6' Hanger Spacing | |
|---|------------------------|-------------------|--------|----------|-----------------------|---------|-------------------|-------------------|-------------------|-------------|
|  | Main Tee ² | Intermediate Duty | 12' | 1-25/32" | DXFF2924 | Class A | Flat White | 12 lbs./LF | 6.5 lbs./LF | 3.6 lbs./LF |
| | | Heavy Duty | 12' | 1-25/32" | DXFFH2924 | Class A | Flat White | 16 lbs./LF | 8.3 lbs./LF | 4.9 lbs./LF |
|  | Cross Tee ⁴ | | 2' | 1-25/32" | DXFF229 | Class A | Flat White | | | |
| | | | 4' | 1-25/32" | DXFF429N ⁵ | Class A | Flat White | | | |

Wall Moldings





**Shadowline
Wall Angle
MS174**





**Wall Angle
M9**



Grid/Edge



Wall Molding Detail⁶



Color

Contact your Customer Service representative for color requests.

Material

Double web hot-dipped galvanized steel tee.

Recycled content

25%. For details, see the Recycled Content selector.

Installation

Must be installed in compliance with ASTM C636, CISCA, and standard industry practices.

Limitations

Severe Environmental Requirements: For exposed grids in non-fire-rated, high-humidity applications, use AX™ or ZXLA™ suspension systems. For exterior applications, suspension should be reviewed by a structural engineer.

ICBO Evaluation

Report Compliance

See ICBO Evaluation Service, Inc., Evaluation Report No. 2244 for allowable values and/or conditions of use concerning material presented in this document, as it is subject to re-examination, revision, and possible cancellation.

L.A. Research

Report Compliance

DONN® Brand suspension systems manufactured by USG Interiors, Inc., have been reviewed and are approved by listing in one or more of the following L.A. Research Report numbers: 22179, 23451, 24095.

ASTM C635 Standard for Load Compliance

This system meets or exceeds UL load compliance specifications per ASTM C635. Main tees will not deflect more than 1/8" over a 48" span (or L/360) in light duty, intermediate duty or heavy duty categories.

Air diffusers

Request AC272-290.

Footnotes

1. Load test data shows uniform load in lbs./LF based on simple span tests in accordance with ASTM C635 deflection limit on L/360.
2. Cross tee notches available in 24", 30", and 48" modules. Standard is 24" o.c.
3. For detailing and module loading request AC3011.
4. Cross tees also available in 30", 1', and 5' lengths.
5. N = Notch at midpoint.
6. For more information on moldings, see Perimeter Options selector.
7. Panels must be field cut to size at the perimeter.

SAFETY FIRST!

Follow good safety practices. Read material safety data sheets and related literature on products before specification and/or installation.



Manufactured by
USG Interiors, Inc.
125 South Franklin Street
Chicago, IL 60606

The following are trademarks of USG Interiors, Inc., or a related company: AX, CLIMAPLUS, DONN, ECLIPSE, FINELINE, QUICK-RELEASE, USG, ZXLA.

AC3033/rev. 6-04
© 2004, USG Interiors, Inc.
Printed in U.S.A.